

# SJ-400



## 13.5L John Deere Powered Generator— Diesel


### SJ Series 400kW



EPA Emissions Compliant

### Standard Features

- John Deere Diesel Engine Model 6135HF485
- AC, Single Bearing direct coupled Alternator with Class 'H' insulation, Sized for 130°C Temperature Rise
- Control Panel with Auto-Start -Stop Basler DGC2020
- Engine and Alternator mounted to steel base on vibration isolators
- Radiator sized for 120°F ambient clearance
- Thermostatically controlled Jacket Water Heater
- High Coolant Temp., Low Oil pressure safety shutdowns
- Dry Type Air Cleaner
- 12-VDC Starter, Engine mounted Battery Charging Alternator, Battery Cables and Rack along with Grounding Strap
- Battery Charger—6 Amp
- Complete set owner/operator, engine, alternator and accessory manuals

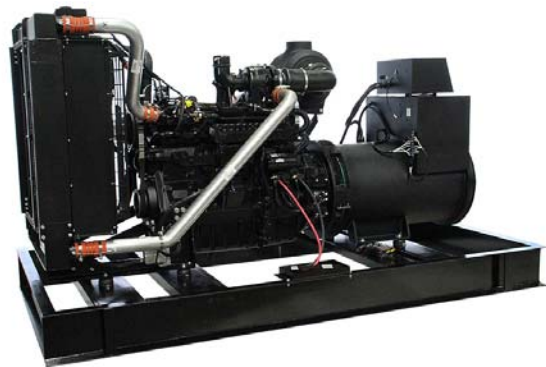

Sample unit shown w/o exhaust silencer

### Generator Ratings—1800 RPM Diesel

Voltage	Ph	Hz	Standby Output kW (kVA)	Prime Output kW (kVA)	Standby Max Amp Output	Wires
120/208	3	60	400 (500)	360 (450)	1388	12
120/240	3	60	400 (500)	360 (450)	1203	12
277/480	3	60	400 (500)	360 (450)	601	12

### Optional Equipment

#### Deluxe Enclosure—Features

- Weather Protective Enclosure constructed of 0.125" marine grade aluminum
- Sound attenuating insulation
- Weather proof and high wind resistant construction
- Powder coat finished exterior and interior (standard grey)
- Removable, hinged doors (pictured) with keyed alike locks
- Interior mounted, residential grade exhaust silencer
- Battery Charger—6 Amp
- 120V Receptacle for battery charger and / or coolant heater
- Vertical radiator and exhaust discharge
- Oil & coolant drain lines with brass ball valves



Sample Deluxe model shown

#### Deluxe Enclosure—Options

- Custom color options
- Exterior mounted Emergency stop button with clear cover
- Exterior accessible GFCI outlet (s) with weather protective cover

#### Additional Gen-set Options

- Mainline circuit breaker (s)
- Permanent Magnet Generators (PMG) with Voltage Regulator upgrade
- Low coolant level switch
- Starting batteries
- 17 Light remote enunciator panel
- 120V Receptacle for battery charger and / or coolant heater
- Sub-base fuel tank
- "Stand-Alone" fuel tank (s)
- Transfer switches
- UL 2200 Certification (Ask your representative for availability)

\*Stand by ratings are applicable for the duration of any power outage. No overload is available at these ratings. Prime ratings are continuous per BS 5514, DIN 6271, ISO3046 & IEC 34-1. Overload capacity on prime-power ratings is 10% for one hour in each twelve hours of operation. All single phase ratings are based on a 1.0 power factor, three (3) phase ratings based on a 0.8 power factor. Ratings are established based on 85°F (29°C) and an elevation of 1,000 feet (305 meters). Please consult your Stateline representative for information concerning derates for temperature, altitude & humidity.

#### Manufactured by:

Stateline Power Corp • 650 Pine Street • Greenville, OH 45331 • 800-524-8344 [www.statelinepower.com](http://www.statelinepower.com)

# SJ-400 Technical Data



## Engine Specifications

**Model: John Deere Diesel Engine 6135HF485**  
*Direct injected, Vertical In-line 4 cycle, 6 Cylinder*  
*Turbocharged & Air cooled, Dry type Air Cleaner*  
 Max. Power.....460 kWm (617 bhp) @ 1800 RPM  
 Cubic Capacity.....824 in<sup>3</sup> / 13.5L  
 Bore & Stroke.....5.20" x 6.50" (132mm x 165mm)  
 Compression Ratio.....16.0:1  
 Governor type.....Electronic  
 Frequency Regulation.....Isochronous, Steady-State ± 0.5%  
 Oil capacity Total system.....64.2 Qts. (61.0 liters)  
 Coolant capacity w/ Radiator.....17.03 Gal. (64.5 liters)

**Filtration:**

Oil Filter.....Spin-on type  
 Air Filter.....Dry element type

**Fuel Consumption:**

Load Percentage (%)	50	75	100
US Gal. / h	15	21.4	30.1

Fuel Supply Line inlet.....1/2" NPT  
 Pressure.....80 in. H<sub>2</sub>O  
 Fuel Type.....BS2869: Part 2 1998 Class A2 or ASTM D975 D2

**Installation Data**

*Exhaust System:*

Recommended Outlet size.....6" (152.4mm)  
 Gas Temp. (stack).....880°F / 471°C  
 Gas Volume @ stack Temp. CFM (m<sup>3</sup>/min).....2860 (81)  
 Max. allowable back pressure.....30 in. H<sub>2</sub>O / 7.5kPa

**General:**

12V Starter, 90 Amps Alternator DC output Electric System  
 Recommended Battery.....(2) 12V, 1900 CCA  
 Recommended Oil.....SAE 5W-30 for 0°F and above

## Alternator Specifications

Type	Pole	Voltage Regulation	Class Insulation	Rated Temp. Standby	Coupling	Load Acceptance
Brushless	4 Pole Rotating Field	+/- 1%, Volts/Hz, Electronic, EMI filtered	'H' to NEMA MG-1 -1.66	130°C Rise / 40°C Ambient	SAE Adapter, Flexible Disc, Direct.	One Step, 100% per NFPA 110
Features	Self ventilated drip-proof construction. Superior voltage waveform achieved by a 2/3 pitch and skewed rotor. Vacuum-impregnated windings with fungus-resistant epoxy for dependability and long-life. Compliance with NEMA, IEEE and ANSI standards for temp. rise. Sustained short-circuit capability enabling down-line circuit breakers to trip without collapsing the generator field. No load to full-load regulation of +/- 2%.					

## Control Panel Specifications

**DGC2020**


- Microprocessor Based, Navigation key with large LCD display
- Event Recording
- Transfer Switch Control (main failures)
- SAE J1939 CANBUS Communication
- Multilingual Capability
- Suitable for Rental application
- Remote Communication capability

**Operational features**


- Alternator Protection: under/over voltage, under/over frequency and Over Load.
- Engine Protection: Low oil pressure, High coolant temperature, Over speed & over crank, Sender Unit failure, Fuel Leak / Fuel sender Failure, Battery Charger Failure
- All protections are programmable as Alarms or Pre-alarms
- Operating Power: Nominal 12-24 Vdc

- Consumption 14.2W run Mode
- Metering ( ample range ): Volts, Current, Hz, Watts, VA, Pf Oil Pressure, Coolant Temperature, RPM, DC Volts, Fuel Level, Engine running time
- Engine Control with Timers
- External remote start input (on or off load)
- 16 programmable contact inputs
- 4 Contact outputs


## Dimensions & Weight




**Open:** (inches) 126L x66W x70H



Weight (lbs.) Unverified



**Deluxe:** (inches) 180 x66W x82H



Weight (lbs.) Unverified